

DEWALT®


JOB SITE HEATERS
CATALOG



GUARANTEED TOUGH.™

HOW MUCH HEAT DO YOU NEED?

YOU CAN CALCULATE THE AMOUNT OF BTU'S
REQUIRED BY USING THE FOLLOWING METHOD:

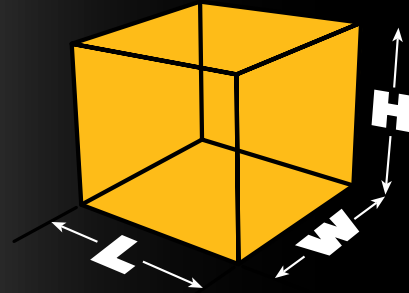

$$\begin{aligned} &\text{DESIRED INSIDE TEMPERATURE} \\ &- \text{OUTSIDE TEMPERATURE} \\ \hline &= \text{TEMPERATURE INCREASE} \end{aligned}$$

1. Measure the space's dimension to determine cubic feet.
(Length x Width x Height = Cubic Feet)
2. Subtract the outside temp from the desired inside temp
to determine the temperature increase.
3. If you have measured temperature in FAHRENHEIT,
calculate the required BTUs with this formula:
(Cubic Feet x Temperature Increase x .133 = Required BTUs)

If you have measured temperature in CELSIUS,
calculate the required BTUs with this formula:
(Cubic Feet x Temperature Increase x .2394 = Required BTUs)

PROPANE VAPORIZATION GUIDE

Lbs. of Propane in Cylinder	Maximum Continuous BTU Per Hour at Various Temperatures		
	0	20	40
100	113,000	167,000	214,000
90	104,000	152,000	200,000
80	94,000	137,000	180,000
70	83,000	122,000	160,000
60	75,000	109,000	140,000
50	64,000	94,000	125,000
40	55,000	79,000	105,000
30	45,000	66,000	85,000
20	36,000	51,000	69,000
10	28,000	38,000	49,000



QUIET BURNER TECHNOLOGY®
PAGE 4



CUTTING EDGE FEATURES
PAGE 5



NEW
CORDLESS FORCED AIR KEROSENE
PAGE 6

DEWALT®

GUARANTEED TOUGH.™


TABLE OF CONTENTS

DESCRIPTION	PAGE
CORDLESS FORCED AIR PROPANE	4
CORDLESS PORTABLE RADIANT	5
NEW CORDLESS FORCED AIR KEROSENE	6
FORCED DIESEL & KEROSENE	7
FORCED AIR PROPANE	8-9
FORCED AIR ELECTRIC	10
PORTABLE RADIANT	11

CORDED OR CORDLESS



20V^{MAX}
LITHIUM ION

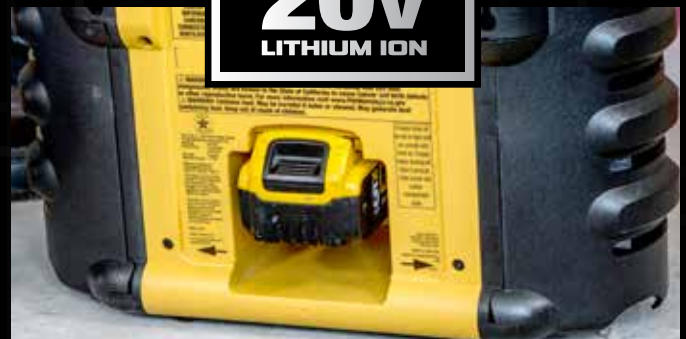

CORDLESS FORCED AIR PROPANE



HYBRID TECHNOLOGY
CORDED OR CORDLESS

DXH70CFAV

SPECIFICATIONS	
Model#	DXH70CFAV
Stock#	F340661
UPC	089301005334
BTU Output	27,000 / 68,000
Heats Up To: (Approx. Sq. Ft.)	1,700
CFM Output	300
Minimum Recommended Tank Size	20 lbs.
Operating Pressure	20 psi.
Approx. Run Time On Minimum Tank Size	7 Hrs. High 13 hrs. Low
Thermostat	NO
Quiet Burner Technology®	YES
Weight	22 lbs.
Shipping Ctn Size (Inches)	19.75 x 11.5 x 14.25



20V^{MAX}
LITHIUM ION

CORDED OR CORDLESS



CORDLESS PORTABLE RADIANT

**PORTABLE
COMFORTABLE
HEAT**

20V^{MAX}
LITHIUM ION

**INDOOR OR
OUTDOOR**



SPECIFICATIONS	
Model#	DXH12B
Stock#	F332000
UPC	089301003361
BTU Output	9,000 / 12,000

DXH12B



3 USB ports to charge portable electronics & accessories



Integrated high speed fan to quickly circulate heat



Powerful LED light bar provides ideal working conditions

- Tip-over safety switch
- Thermal shut-down system™
- Automatic low oxygen safety shut-off system (ODS)
- Dual tank capacity for 7 hour run-time
- Powered by the 20V MAX[®] & FLEXVOLT[®] family of DEWALT batteries
- AAA battery included for igniter
- CSA Certified Indoor Safe



GUARANTEED TOUGH.™ 5

NEW CORDLESS FORCED AIR KERSENE

**QUIET
BURNER
TECHNOLOGY®**

**HYBRID
TECHNOLOGY**
CORDED OR CORDLESS



DXH90CFAKM

SPECIFICATIONS

Model#	DXH90CFAKM
Stock#	F340991
UPC	089301995284
BTU Output	90,000
Heats Up To: (Approx. Sq. Ft.)	2,250
CFM Output	250
Minimum Recommended Tank Size	20 lbs.
Operating Pressure	20 psi.
Approx. Run Time On Minimum Tank Size	6 hrs.
Thermostat	YES
Quiet Burner Technology®	YES
Weight	30 lbs.
Shipping Ctn Size (Inches)	26.5 x 17.25 x 19.5

20V^{MAX}
LITHIUM ION

**CORDED OR
CORDLESS**



FORCED AIR DIESEL & KEROSENE



- DEWALT TOUGH® design
- Multi-fuel capability; Kerosene, JP8, #1 and #2 Diesel, #1 and #2 Fuel Oil
- Cold weather start (0° F)
- Overheat safety shut-off
- Continuous ignition
- Fuel gauge
- Thermostat
- 1" tubular roll cage and barrel support
- Foam-filled flat-free tires
- CSA Certified
- Roll cage
- Barrel support/storage box
- Recessed knobs



Model #	DXH90CFAKM	DXH50K	DXH75KT	DXH135HD	DXH190HD	DXH215HD
Stock#	F340991	F340670	F340675	F340690	F340695	F340700
UPC	089301995284	856795406707	856795406752	856795406905	856795406950	856795407001
BTU Output	90,000	50,000	75,000	135,000	190,000	215,000
*Heats Up To: (Sq. Ft.)	2,250	1,200	1,750	3,500	4,200	6,500
Run Time: (Approx.)	6 Hrs	11 Hrs	11 Hrs.	9.5 Hrs	10 Hrs.	9.5 Hrs.
CFM Output	250	165	240	275	400	400
Tank Size (Gallon)	4	4	6	14	14	14
Thermostat	Included	Sold Separately	Included	Included	Included	Included
Tires	N/A	N/A	N/A	Foam filled flat-free	Foam filled flat-free	Foam filled flat-free
Weight	30 lbs.	33.75 lbs.	39 lbs.	60 lbs.	74 lbs.	106.5 lbs.
Shipping Ctn Size (Inches)	26.5 x 17.25 x 19.5	32.5 x 14.25 x 14.75	32.25 x 14.25 x 17	39.75 x 18.25 x 20.75	39.75 x 18 x 21	42 x 18 x 22

*Heating area based on average insulation, ceiling height and desired temperature rise.



FORCED AIR PROPANE



**QUIET
BURNER
TECHNOLOGY®**



FORCED AIR PROPANE

QUIET BURNER TECHNOLOGY®
50% QUIETER THAN A STANDARD
PROPANE HEATER



- Quiet Burner Technology®
- 50% Quieter than a standard propane heater
- Thermostat
- High temperature limit switch
- Heavy-duty handle
- Split barrel design for easy maintenance
- Hose & Regulator Included
- ETL Certified



Model#	DXH40FA	DXH65FAV	DXH90FAV	DXH125FAV	DXH150FAV	DXH170FAVT	DXH210FAVT
Stock#	F340705	F340710	F340715	F340720	F340725	F340730	F340735
UPC	856795407056	856795407100	856795407155	856795407209	856795407254	856795407308	856795407353
BTU Output	40,000	35,000 / 65,000	50,000 / 90,000	75,000 / 125,000	100,000 / 150,000	125,000 / 170,000	160,000 / 210,000
*Heats Up To: (Sq. Ft.)	800	1,250	2,000	3,200	3,500	4,000	6,000
CFM Output	100	300	300	350	400	450	450
Minimum Recommended Tank Size	20 lbs.	20 lbs.	20 lbs.	40 lbs.	100 lbs.	100 lbs.	(2x) 100 lbs.
Operating Pressure	10 PSI	20 PSI	20 PSI	20 PSI	20 PSI	20 PSI	20 PSI
Approx. Run Time On Minimum Tank Size	12 Hrs.	7 Hrs. High 14 Hrs. Low	4.5 Hrs. High 8 Hrs. Low	6.5 Hrs. High 11 Hrs. Low	12 Hrs. High 17 Hrs. Low	10.5 Hrs. High 17 Hrs. Low	10 Hrs. High 13 Hrs. Low
Thermostat	NO	NO	NO	NO	NO	YES	YES
Quiet Burner Technology®	YES	YES	YES	YES	YES	YES	YES
Weight	19 lbs.	21 lbs.	21 lbs.	23 lbs.	28 lbs.	29 lbs.	38 lbs.
Shipping Ctn Size (Inches)	20.5 x 9.75 x 12.75	19.75 x 11.5 x 14.25	18.5 x 11.5 x 14.25	21.25 x 11.75 x 16	21.25 x 11.75 x 16	26.75 x 11.75 x 16.5	26.75 x 11.75 x 16.5

*Heating area based on average insulation, ceiling height and desired temperature rise.



FORCED AIR ELECTRIC

**THERMOSTATICALLY
CONTROLLED**



Model#	DXH165	DXH330	DXH1000TS	DXH2000TS	DXH2003TS
Stock #	F340635	F340640	F340645	F340650	F340655
UPC	856795406356	856795406400	856795406455	856795406509	856795406554
Kilowatts	1.5 kW	3.3 kW	10 kW-Hi 7 kW-Lo	20 kW-Hi 13 kW-lo	20 kW-Hi 13 kW-Lo
Multiple Heat Setting	NO	NO	YES	YES	YES
BTU/HR	5,118	11,260	34,121-(Hi) 23,884-(Lo)	68,242-(Hi) 44,357-(Lo)	68,242-(Hi) 44,357-(Lo)
CFM Output	135	230	394	661	661
Volt	115V	240V	240V	240V	240V
Minimum Breaker	13.5 Amp	2 pole 15 amp	2 pole 50 Amp-(Hi) 30 Amp-(lo)	2 pole 100 Amp-(Hi) 60 Amp-(lo)	4 Wire 50 Amp-(Hi) 40 Amp-(lo)
Phase	Single	Single	Single	Single	3 Phase
Fan Only Operation	NO	NO	NO	YES	YES
Cord/Plug Included	YES	NO	NO	NO	NO
Cord Kit	N/A	F102870	F102875	F102885 / F340740	F102880 / F340740
Weight	14 lbs.	19 lbs.	35 lbs.	45 lbs.	48 lbs.
Shipping Ctn Size (Inches)	14 x 11 x 14	15.75 x 13.5 x 17	25 x 14.5 x 18.5	29.5 x 16.5 x 21.25	29.5 x 16.5 x 21.25

*Heating area based on average insulation, ceiling height and desired temperature rise.

PORTABLE RADIANT

**EFFICIENT
RADIANT
HEAT**




DXH45LP

SPECIFICATIONS

Model#	DXH45LP
Stock#	F340620
UPC	856795406202
BTU Output	45,000
Heats Up To: (Approx. Sq. Ft.)	900
CFM Output	N/A
Minimum Recommended Tank Size	20 lbs.
Operating Pressure	28" w.c.
Approx. Run Time On Minimum Tank Size	9 Hrs.
Weight	15 lbs.
Shipping Ctn Size (In Inches)	12.75 x 13 x 34



DEWALT®



If you have questions or comments, contact us.
855-805-5745 • www.dewalt.com

DEWALT®, GUARANTEED TOUGH® and the yellow and black color scheme are trademarks of the DEWALT Industrial Tool Co., used under license.
© 2023 DEWALT. EGI/Enerco Group Inc.
Under license from DEWALT Industrial Tool Co.

L361

DEWALT®
GUARANTEED TOUGH.™

www.DEWALT.com

8/23